



quality . experience . service

# Static Canister Filter

## Static Canister Filter



DRB Industries' **Static Canister Filters** are perfect for use in supply air systems for gas turbines and turbo compressors both on and off shore. Plastic end caps (optional) eliminate the risk of rust and corrosion. Depth Loading Synthetic non-shredding media resists moisture, chemicals, and all types of bacterial growth. **Static Canister Filters** are designed to provide low pressure drops while maximizing useful lifetimes, even under extreme operating conditions.



*Designed to provide low pressure drops while maximizing useful life*

### Sizes and Part Numbers

Description	Part #	Size	
Static Canister Filters Available in F5-F8 Efficiencies	CF-GDXF5	12.75" (324mm) x 8.38" (213mm) x 22" (559mm)	
	CF-GDXF6	12.75" (324mm) x 8.38" (213mm) x 22" (559mm)	
	CF-GDXF7	12.75" (324mm) x 8.38" (213mm) x 22" (559mm)	
	CF-GDXF8	12.75" (324mm) x 8.38" (213mm) x 22" (559mm)	
Filtering Area	120 ft <sup>2</sup> (3m <sup>2</sup> )	Moisture Resistance	100%
Initial Pressure Drop @ 1500 cfm	0.85" w.g. (212 Pa)	Average Arrestance	100%
Recommended Final Pressure Drop	3.2" w.g. (800 Pa)	Average Efficiency	96%
Thermal Stability	158°F (70°F) Peaks to 176°F (70°C)	Nominal Volume Flow Rate	600 ft <sup>3</sup> /min (1000m <sup>3</sup> /h)

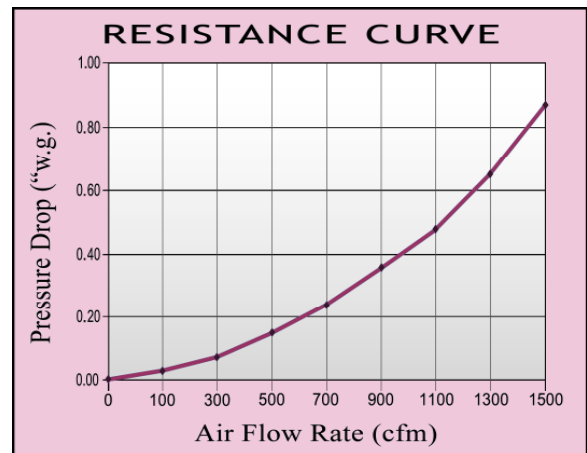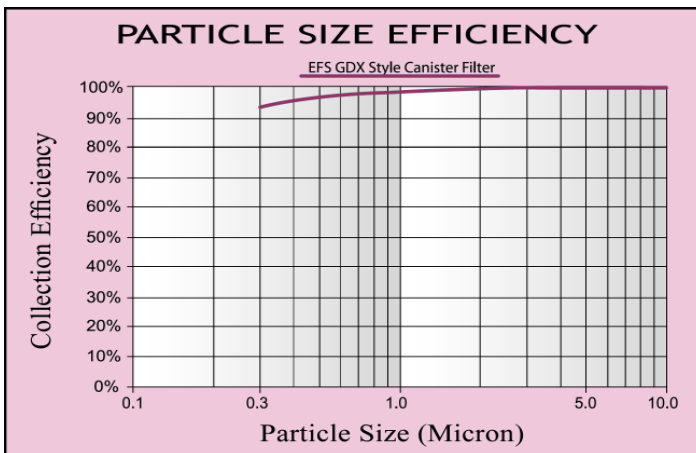

3104 South Elm Place, Suite I  
Broken Arrow, OK 74012  
Phone: 918.286.7176  
Fax: 918.286.7215  
sales@drbindustries.com  
www.drbindustries.com

Contact us for a quote

