



quality . experience . service

## Pulse Filter Combo Cylindrical / Conical Cartridge

# Pulse Filter Cartridge Combination

DRB Industries' **Cylindrical – Conical Pulse Filter Cartridge Combination System** comes in a variety of media choices to fit your operating conditions. With our **Pulse Filter Cartridges** you get High Efficiency Media, Low Pressure Drop, and High Dust Holding Capacity in a Rugged Filter System. We use pleat Separators and hot spiral glue bead to add extra stability to the media surface. Corrosion resistant Galvanized Metal Liners and End Caps are standard (SS is also available). A seamless gasket is part of the PFC – Combination to provide an air tight seal.



*Available in Donaldson, Braden, Pneumafil & AAF Filter House sizes. Please specify when ordering!*

## Sizes and Part Numbers


\*based on Blended Synthetic media

Description	Part #	Size
Cylindrical Cartridge	CF-CY26	12.75" (324mm) x 8.38" (213mm) x 26" (660mm)
	CF-CY29	12.75" (324mm) x 8.38" (213mm) x 29" (737mm)
	CF-CY30	12.75" (324mm) x 8.38" (213mm) x 30" (762mm)
	CF-CY36	12.75" (324mm) x 8.38" (213mm) x 36" (914mm)
Conical Cartridge for Donaldson Systems	CF-CO26D	12.75" (324mm) x 17.5" (445mm) x 26" (660mm)
Conical Cartridge for Braden Systems	CF-CO26B	12.75" (324mm) x 16" (406mm) x 26" (660mm)



3104 South Elm Place, Suite I  
Broken Arrow, OK 74012  
Phone: 918.286.7176  
Fax: 918.286.7215  
sales@drbindustries.com  
www.drbindustries.com

Contact us for a quote





quality . experience . service

# Pulse Filter Combo Cylindrical / Conical Cartridge

## Construction

### 100% Airtight Adhesive


Used on all Filters to prevent bypass and seal all components

### Pleat Separators

On inside & outside of pleat pack to provide proper spacing, better dust holding capacity, and lower pressure drop

### Media Choices

**Cellulose**  
**Synthetic Blend**  
**100% Synthetic**  
**Spun Bond Polyester**  
**Nano-fiber**

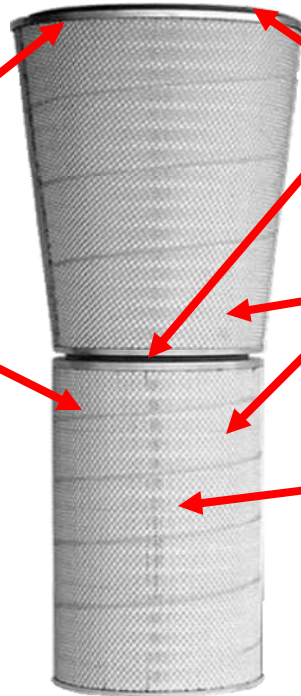

### Seamless Rubber Gasket

Standard on all Filters

### Metal Supports

Filters are standard with expanded metal for strength and support

### Corrosion Resistant

All Filters are Zinc Coated to provide superior rust & corrosion protection

**Also available in 304 or 316 Stainless Steel**

## Specifications

\*based on Blended Synthetic media

Initial Resistance	Dust Holding Capacity	Air Flow Rate	Efficiency
0.45" w.g.	5322 grams	1600 cfm	MERV 13
Pleated Medias Available	Materials		Gasket
Cellulose	Corrosion Resistant Galvanized Metal End Caps & Internal / External Liner		Seamless Rubber Gasket
Blended Synthetic			
100% Synthetic Media			
Spun-Bond Polyester	Media Area: Cylindrical 226 sq ft Conical 275 sq ft		Breach Test > 25.00 w.g.
Nano-fiber			



3104 South Elm Place, Suite I  
Broken Arrow, OK 74012  
Phone: 918.286.7176  
Fax: 918.286.7215  
sales@drbindustries.com  
www.drbindustries.com

Contact us for a quote

